


Nanodyne Replacement Illuminator for Olympus CX40 Microscope Installation Instructions: Included Items



- Also Included but not shown:**
PN 10337 Hex Key 2mm Short Arm (for M3 BHCS)
- Tools not included but required:**
Phillips Screwdriver
11 mm socket
Misc tools for removing panels and original illuminator from microscope.

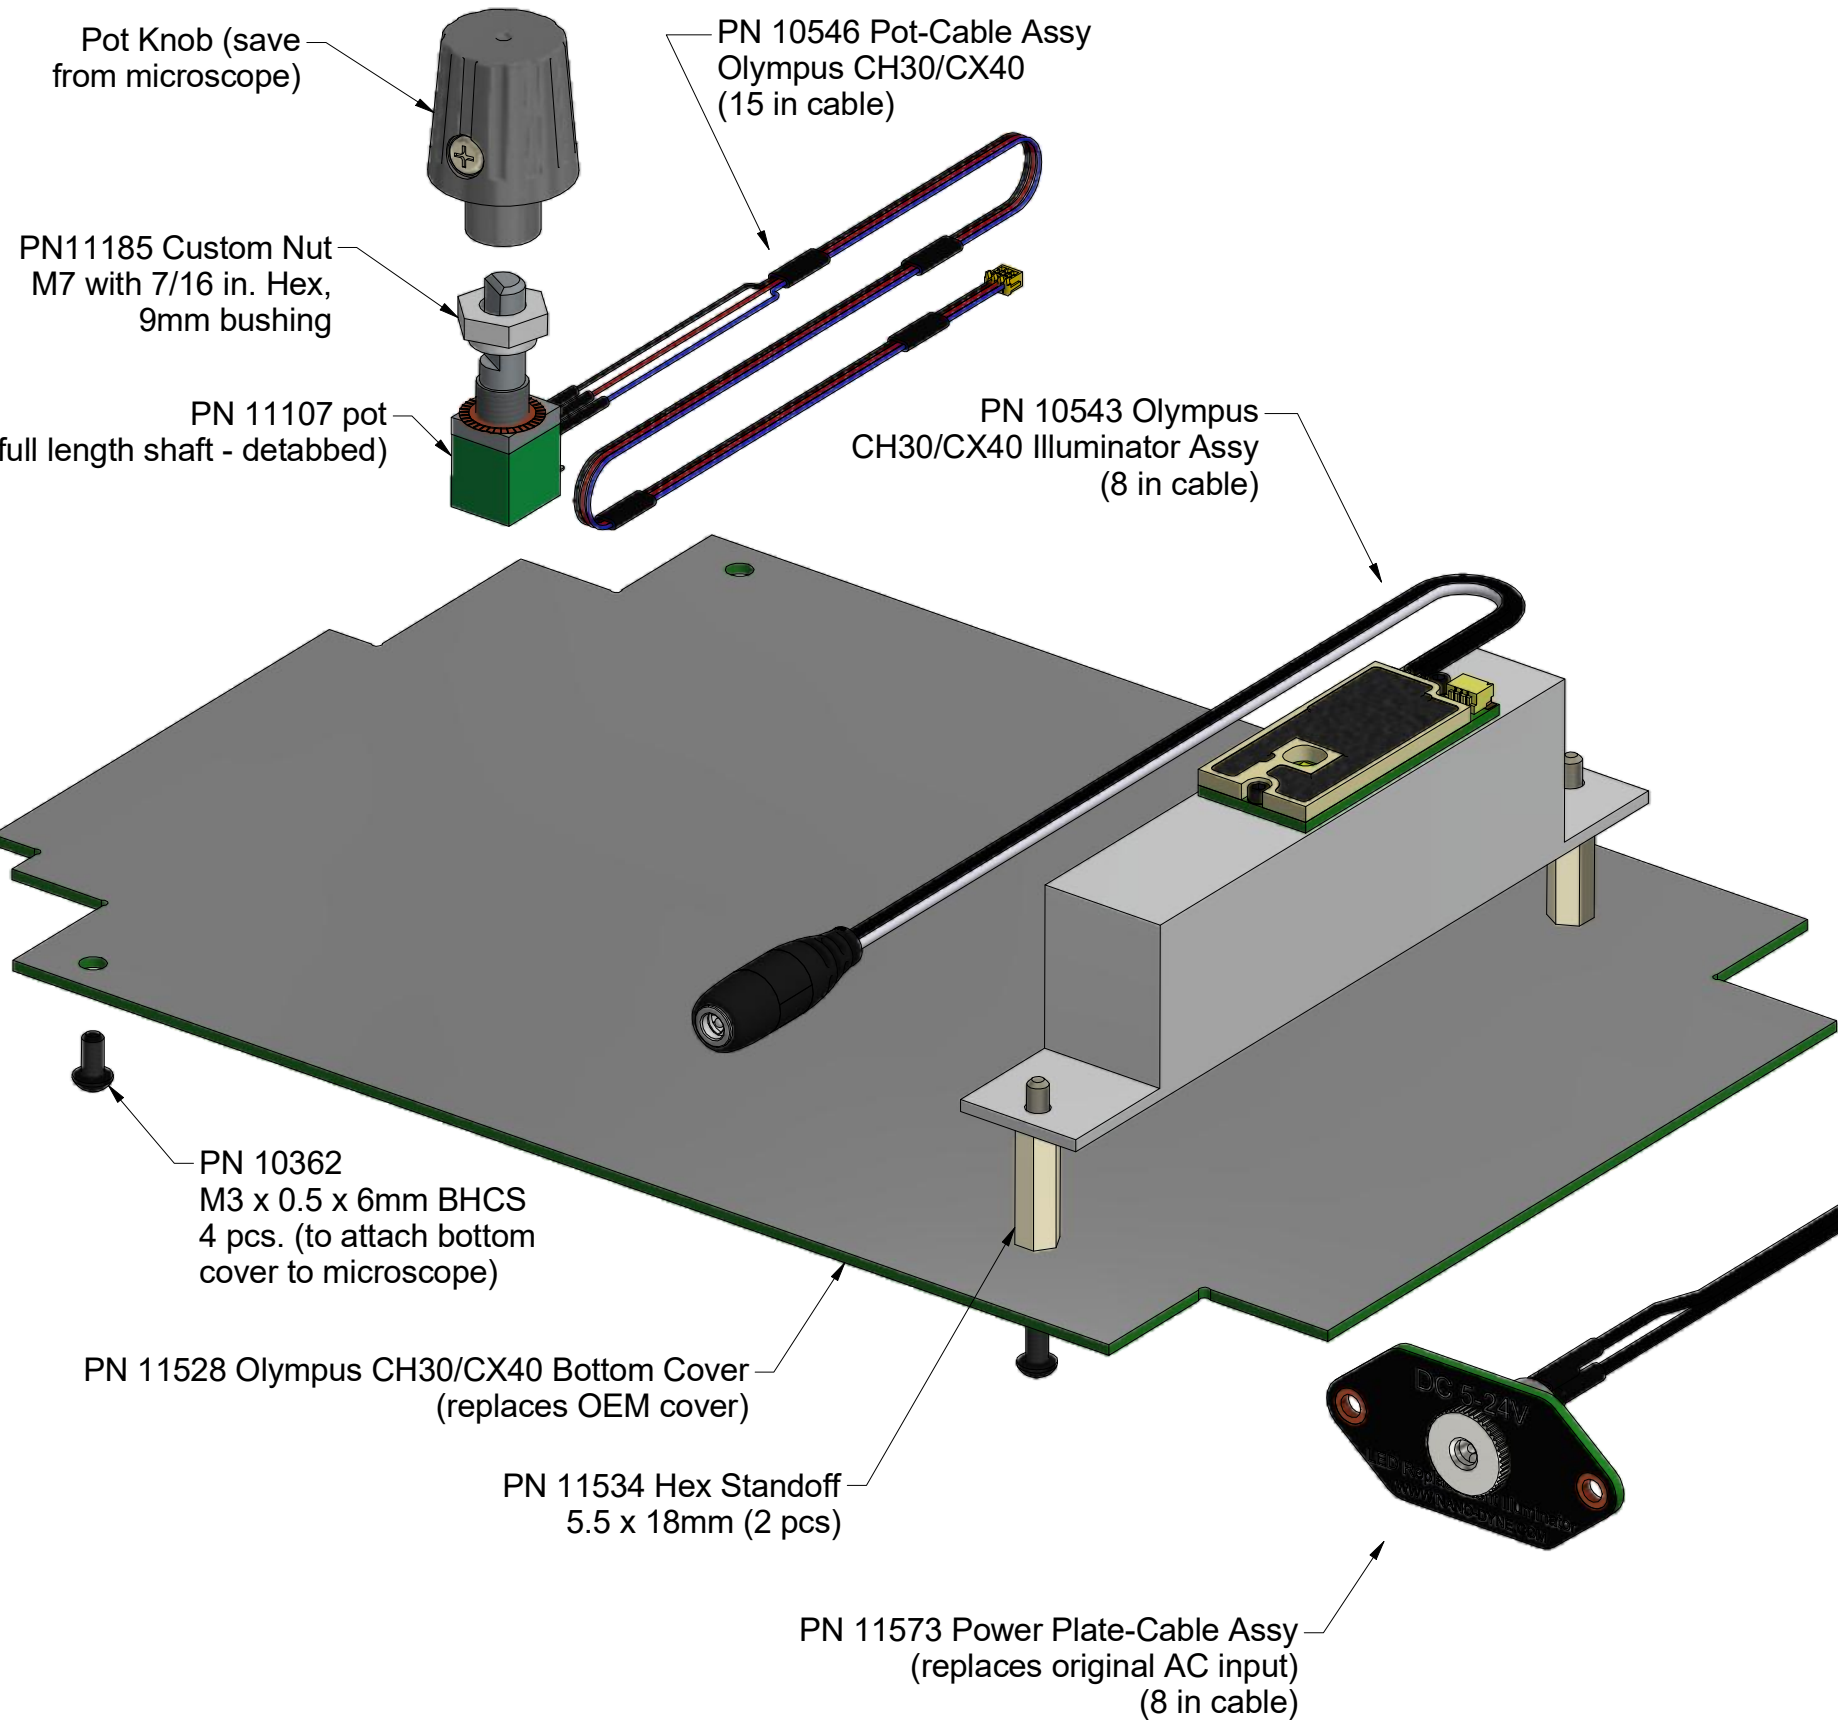

3M VHB Tape to secure wires.



The illuminator may be powered by plugging the cable into the power supply provided, or into a suitable USB port on a computer or other device.

Power supplies are subject to substitution without notice due to availability issues and changes in regulations.

PN 10733 Power Supply & PN 10734 Cable Assy 1.35mm ID x 3.5mm OD RA plug to USB A 6 ft.

Wayne Bonin		1/18/2020	
PN 10556 Olympus CX40 Illuminator Installation Instructions		REV	3
SHEET 1		OF	6

Nanodyne Replacement Illuminator for Olympus CX40 Microscope Installation Instructions - Step 1. Remove back cover and old lamp housing.



Photo 1a



Photo 1b



Photo 1c



Photo 1d



Photo 1e

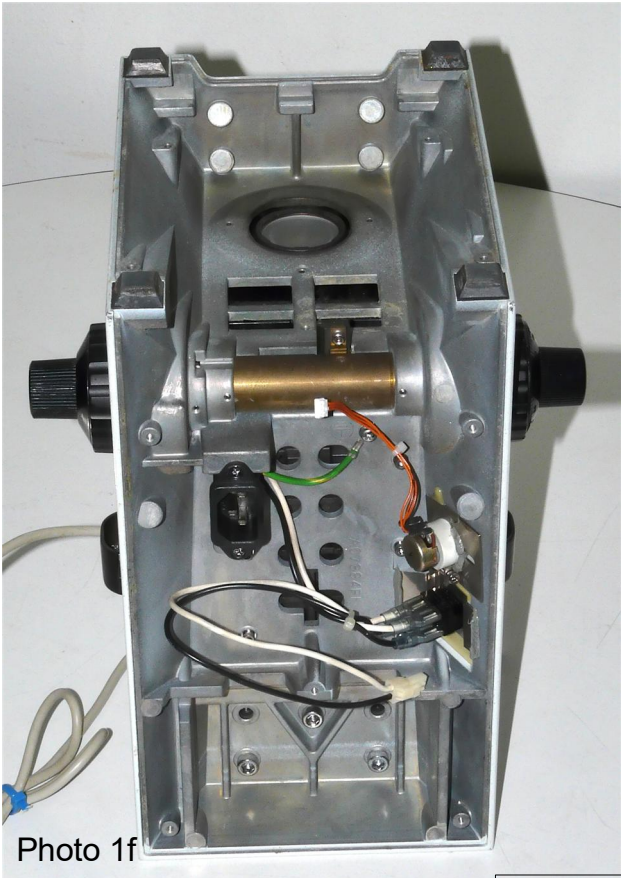


Photo 1f

Be sure AC power is disconnected. Remove back cover, and original illuminator from the bottom of microscope.

Be sure that the now unneeded 115/230 VAC wiring (white and black wires) cannot cause a short circuit in case AC power is connected by mistake sometime. They can be completely removed if desired.

Nanodyne Replacement Illuminator for Olympus CX40 Microscope Installation Instructions - Step 2. Remove old potentiometer.



Photo 2a



Photo 2b



Photo 2c



Photo 2d



Photo 2e

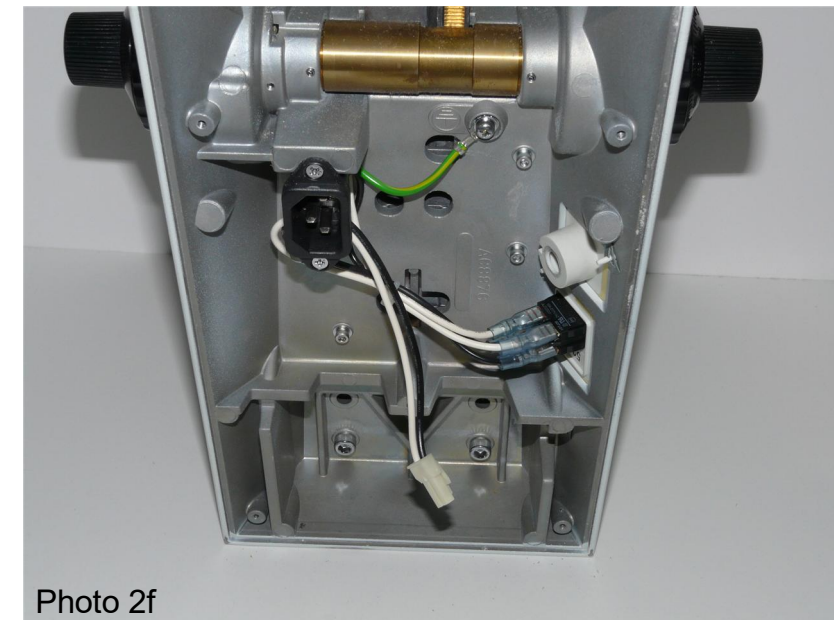


Photo 2f

Remove the original adjustment pot. First remove the knob by loosening the screw with a phillips screwdriver. Then remove the nut with an 11mm hex socket. You should be able to turn the socket by hand. If it is too tight a deeper socket than shown will be required.





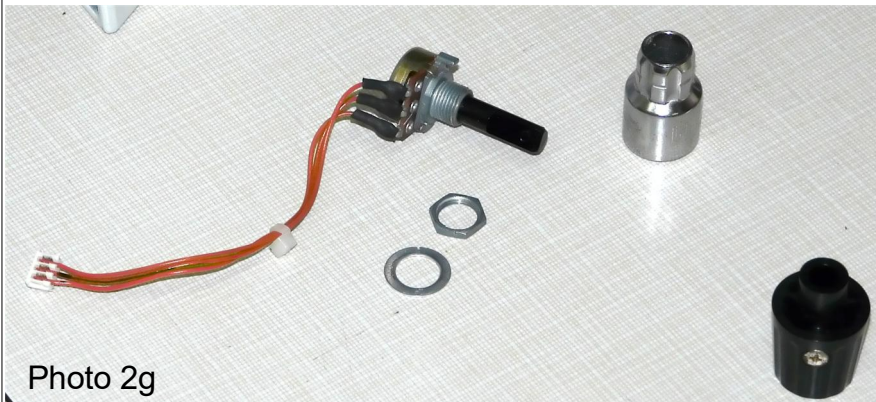


Photo 2g

Keep the original washer and knob shown at left to install the new pot.

Wayne Bonin	1/18/2020
PN 10556 Olympus CX40 Illuminator Installation Instructions	REV 3
SHEET 3 OF 6	

Nanodyne Replacement Illuminator for Olympus CX40 Microscope Installation Instructions - Step 3. Attach Nanodyne illuminator and pot cable assembly.

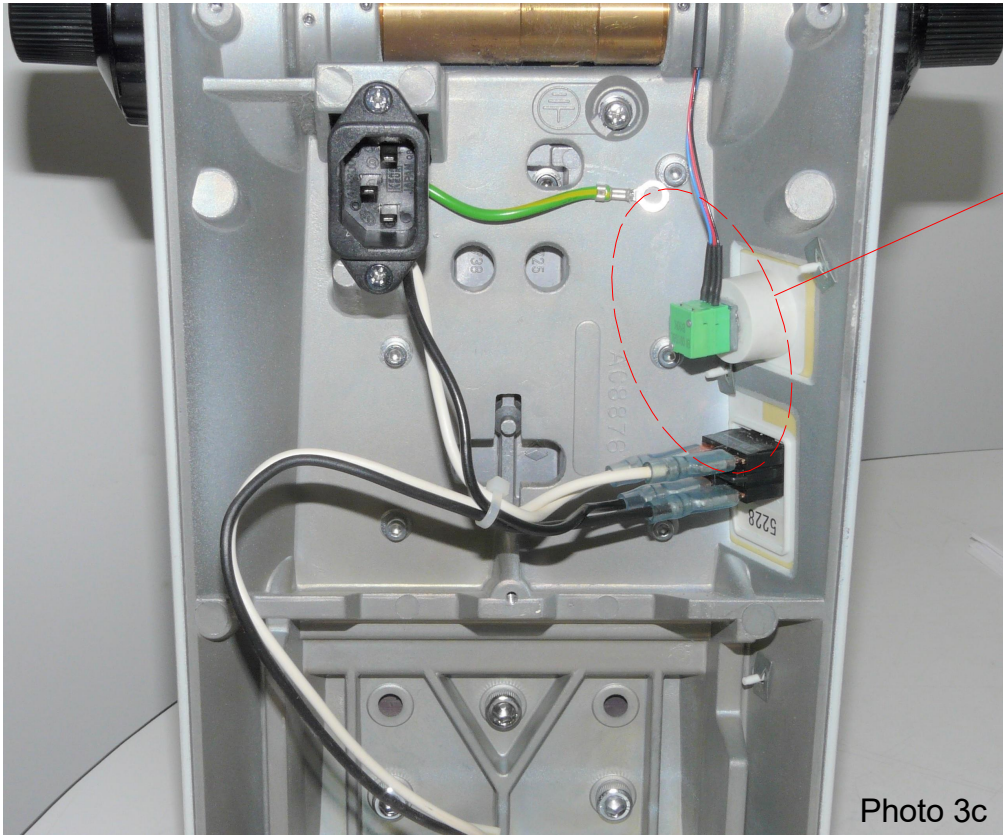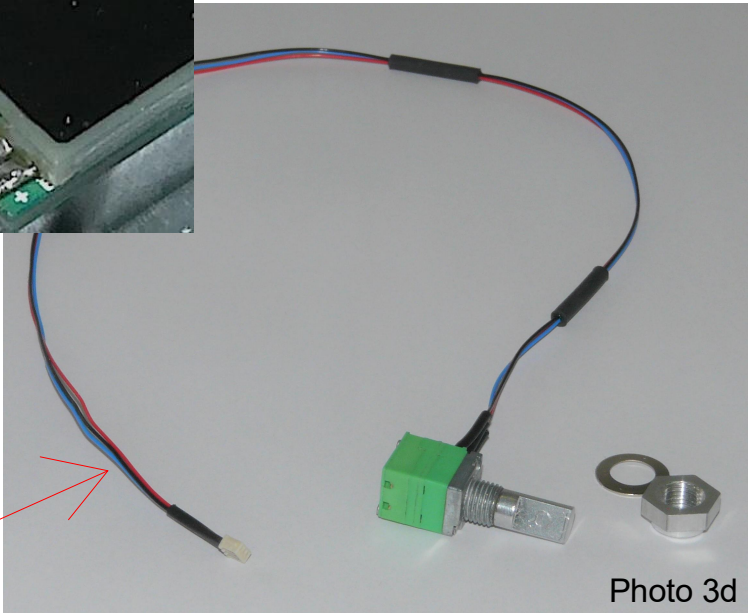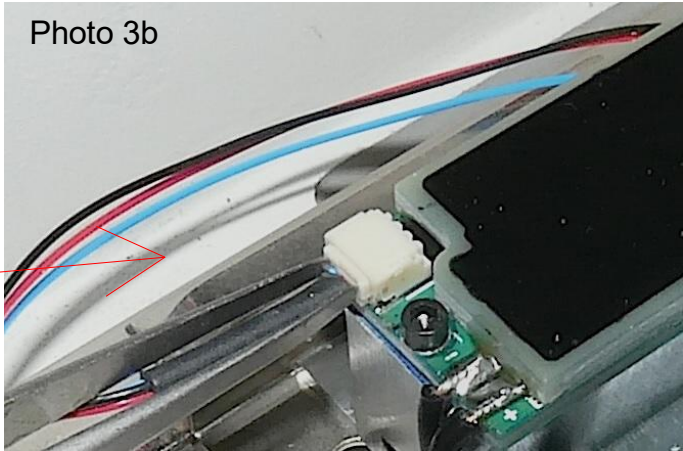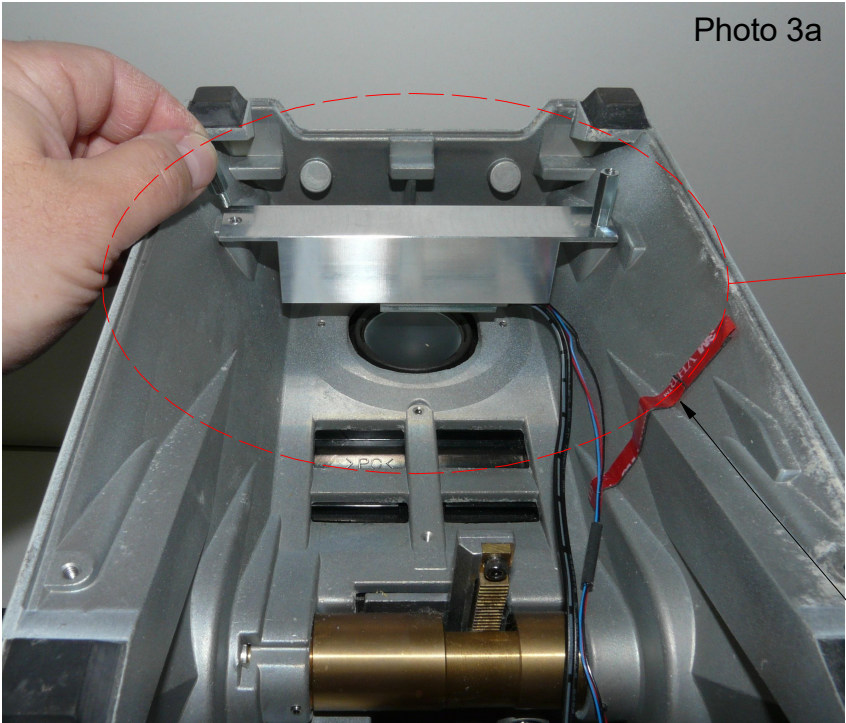

Note: The new Pot Cable Assembly is shown in photo 3d.




Position the illuminator assembly as shown in the photo 3a, and secure with the two 5.5mm diameter x 18mm long hex standoffs by hand.

Install the new adjustment pot as shown in photo 3c, securing it in place with the custom nut (provided) and washer (saved from the original pot). Getting the nut started may be rather difficult. Tilting the microscope so that the shaft of the pot points straight up will help, as gravity is then helping rather than fighting you.

After getting the nut started on the threads of the pot, tighten it snugly by hand with the socket as shown in photo 3e. Then replace the knob.

Connect the pot cable to the white connector on the illuminator circuit as shown in photo 3b. Note that the connector is keyed to fit only one way.

Nanodyne Replacement Illuminator for Olympus CX40 Microscope Installation Instructions - Step 4. Remove unneeded AC power switch and cable. Install DC power plate.

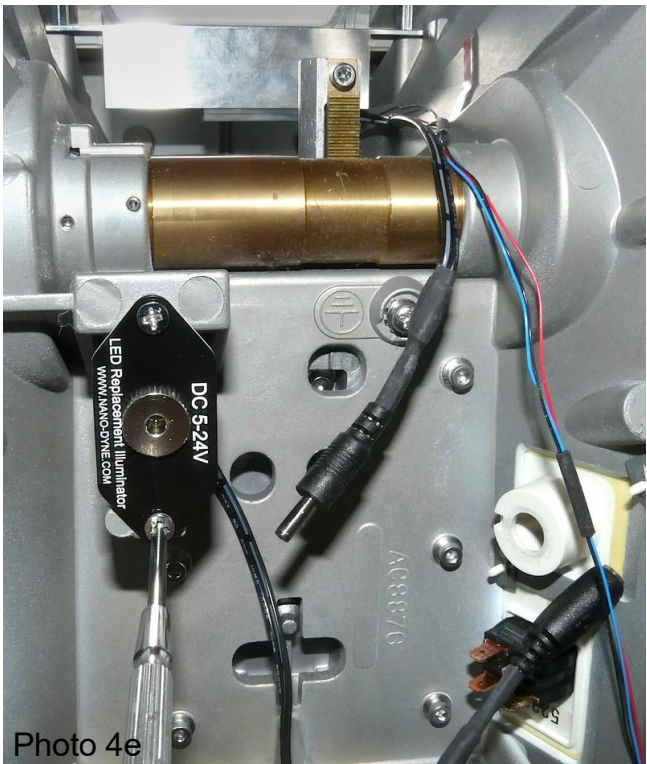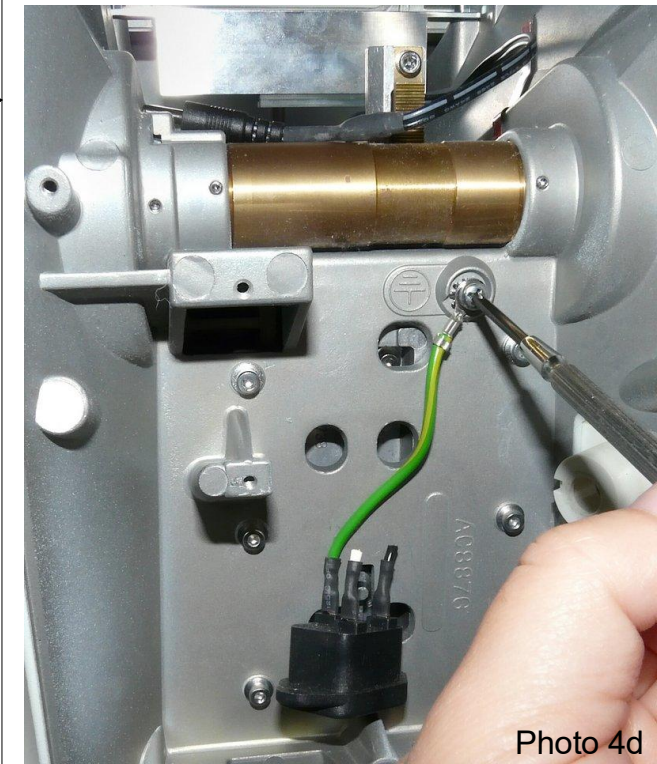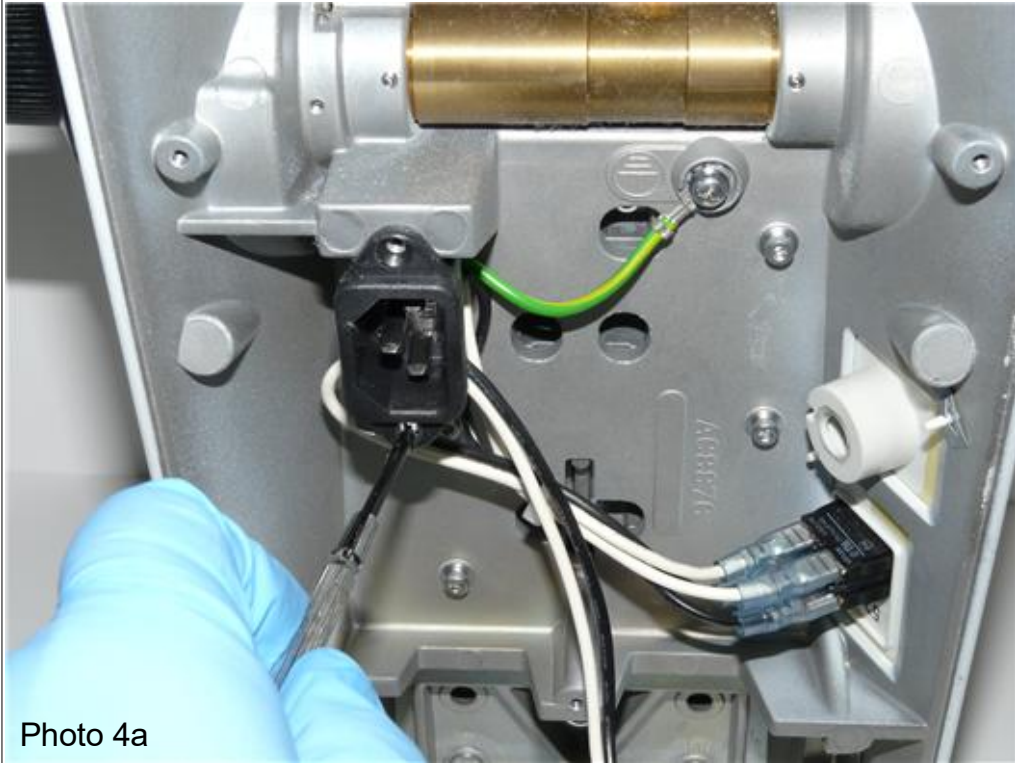

Unscrew AC power connector (photo 4a) and unplug the power cable from the power switch (photo 4b). Cut the black and white wires if desired (photo 4c). Unscrew ground cable (photo 4d). Attach DC power plate assembly (photo 4e) and plug in the power cable (photo 4f). The new illuminator system runs on its own DC power supply, so the AC connections are no longer needed. In addition, removing the AC power lines is a safety measure to avoid electrical shock if the microscope was plugged in by mistake while being maintained.

Wayne Bonin		1/18/2020
PN 10556 Olympus CX40 Illuminator Installation Instructions		REV 3
SHEET 5		OF 6

Nanodyne Replacement Illuminator for Olympus CX40 Microscope Installation Instructions - Step 5. Re-install back cover, secure cables and connect new power supply.



Photo 5a

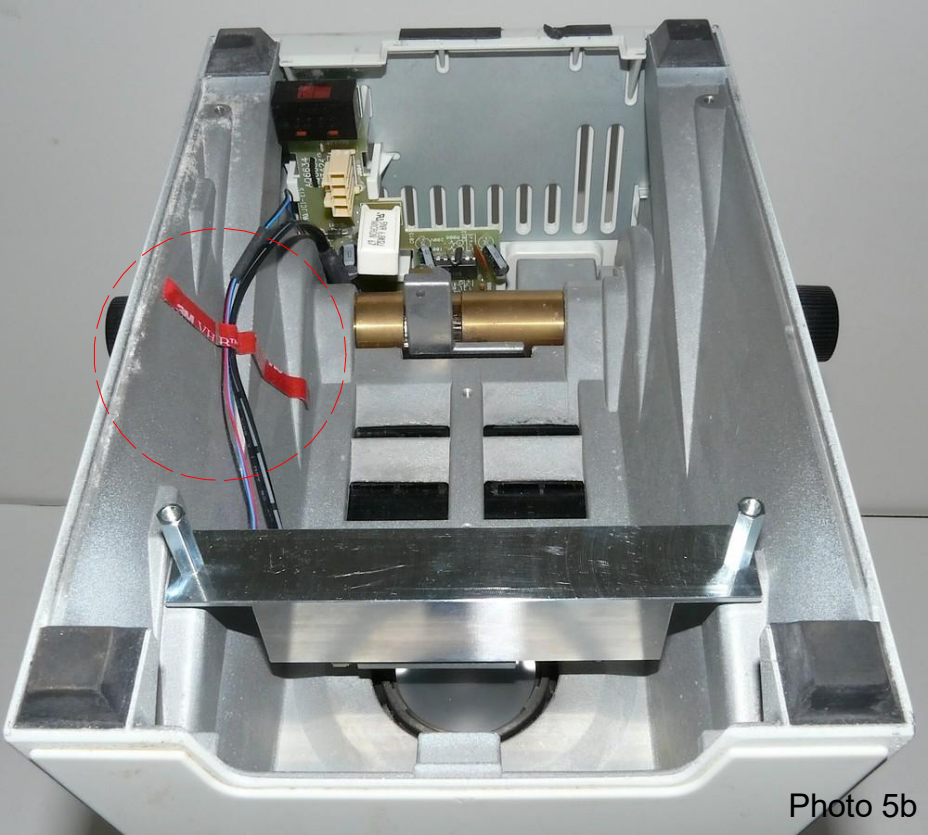


Photo 5b

Replace the back cover on the microscope (photo 5a).

Secure the cables with the 3M VHB tape provided, so the cables cannot get caught in the rack and pinion mechanism, or hang out the bottom (red circle in photo 5b).

The original bottom cover is integral with the old illuminator, and will not fit with the new illuminator installed without extensive modification. Install Nanodyne bottom cover using M3 button head cap screws provided (photos 5c & 5d).

Plug the power supply cable into the DC power plate (photo 5e).

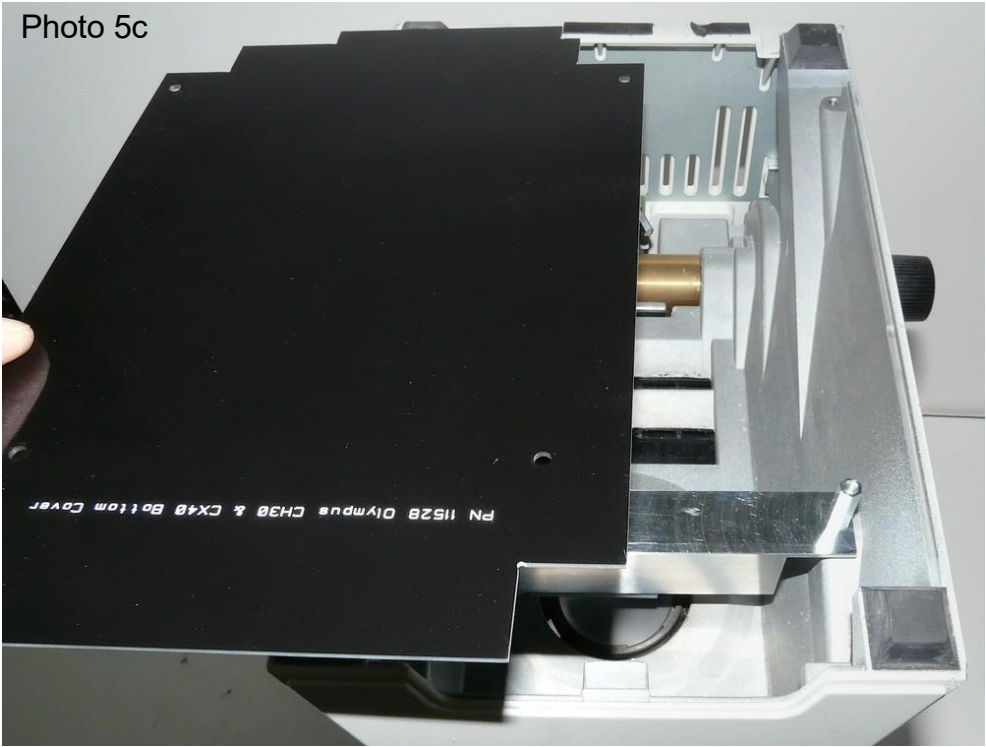


Photo 5c



Photo 5d



Photo 5e